



REVISION HISTORY				
REV	ECO	DESCRIPTION	DATE	APPROVED
-(NEW)	NIL	INITIAL RELEASE	2025-01-20	N. WANKE

NOTES:



1. REFER DOCUMENT NO: 290-001-00 FOR INSTALLATION INSTRUCTIONS
2. FORMFACTOR TO SUIT ARINC 404 1/2 ATR SHORT CASE CONFIGURATION
3. CHASSIS GALVANICALLY ISOLATED FROM SIGNALS AND 28V INPUT
4. MAXIMUM POWER CONSUMPTION - 15 WATT (28V 0.5 AMP), 5 WATT NOMINAL
5. REFER INTERCONNECT TABLE SHEET 2 FOR PINOUT
6. SELECTION OF ARINC-557 / ARINC-757 CONFIGURATION VIA STRAP OR FIELD LOAD CONFIGURATION FILE
7. RIPS ENABLE ACTIVATED VIA PIN 7/8 RECORD ENABLE LOOPBACK
8. FINISH: MIL-DTL-5541 TYPE II CLASS 3 ON BONDING SURFACES, MIL-PRF-85285 TOP COAT (INTERNATIONAL ORANGE)

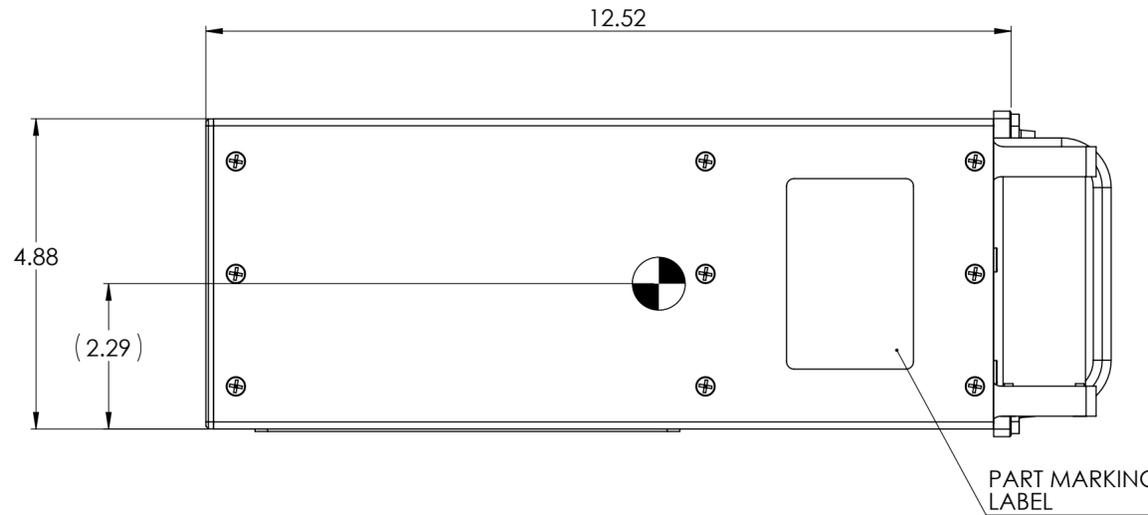

NOTE:  
KEYING VARIES BETWEEN  
ARINC757 AND ARINC757A

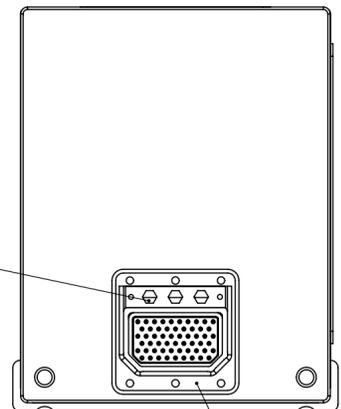

INTERFACE CONNECTOR: DPXBMA-57-34P-0001  
MATING CONNECTOR: DPXBMA-57-33S-0001 (or equivalent)

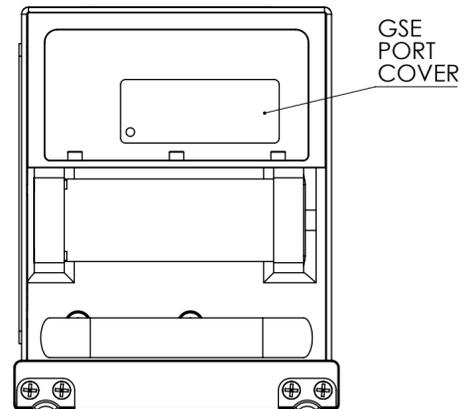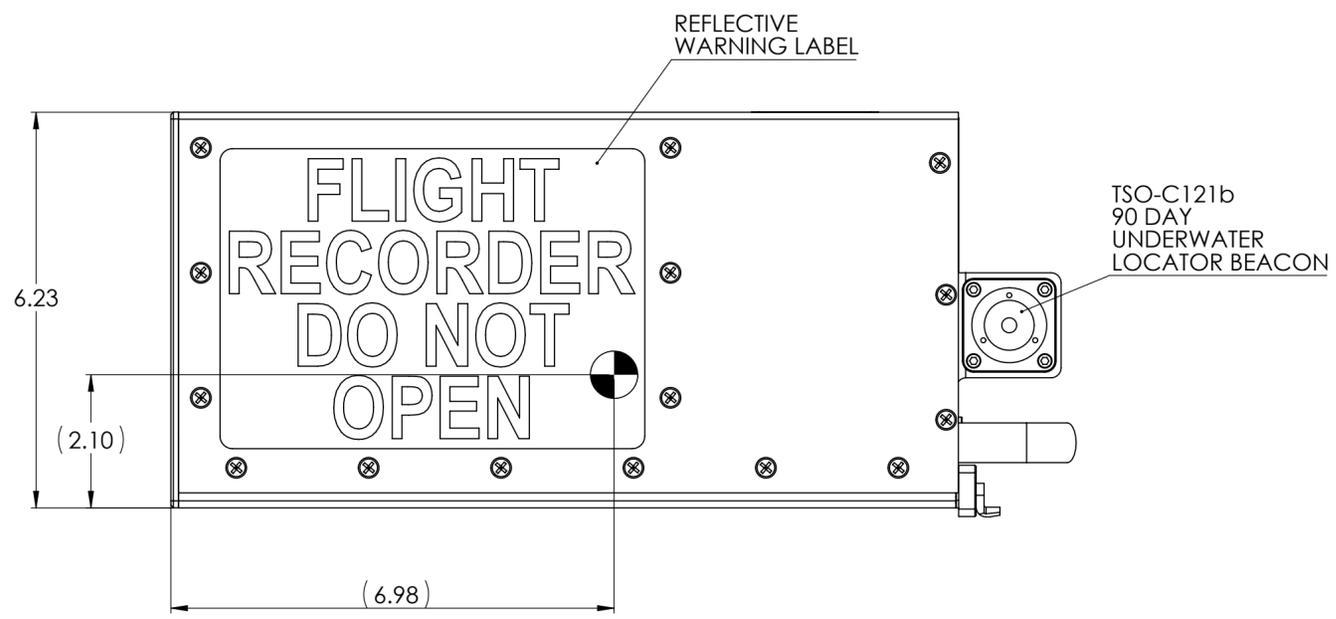

THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE AND CONFIDENTIAL PROPERTY OF ONE STOP JETS LLC AND SHALL NOT BE DISTRIBUTED OR REPRODUCED IN WHOLE OR IN PART, WITHOUT WRITTEN CONSENT.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH: <b>REFER NOTES</b>	DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	-(NEW)
			TITLE: <b>COCKPIT VOICE RECORDER (25 HOUR) WITH RIPS</b>		
MATERIAL: N/A			DWG NO.	280-100-00	
WEIGHT: 8 lb MAX			SCALE:1:2	SHEET 1 OF 2	

